

## Modular Electric Pizza Ovens

FULL SIZE, versatile and high efficient – stone hearth ovens




- 80 Different Sizes  
*Including Modular and CounterTop ovens*
- High Power
- High Temperature
- Special Clay Hearthstone
- Unique Scandinavian Design
- “Extra” is Standard
- Smart Unique Options
- International Certificates

### Standard equipment

- Dual halogen lighting in each deck
- Hearth of natural material with crisping function
- Stainless steel front
- Turbo start function
- Legs with lockable castors  
*castors not on 5 deck ovens*
- Indicators for thermostat, turbo-start and service
- Retractable frontal unloading shelf *not 4 / 5 deck oven and 3 deck oven with UBC*
- Eyebrow hood
- See-through oven door with heat-reflecting glass
- 400°C / 752°F as standard
- Digital Display *ED model only*
- Timer with manual shut-off alarm *ED model only*
- Auto-Timer with alarm *ED model only*
- Classic display *E model only*

### External and Internal dimensions, kW and stones per deck for models

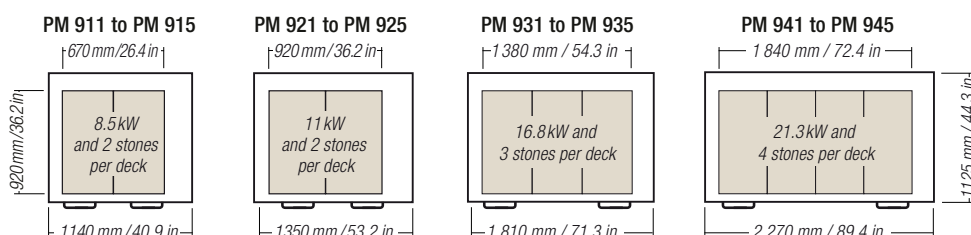

### Mandatory fields

#### Available displays



☐ Digital - ED model



☐ Classic - E model

#### Electrical connection

- |                                     |                                     |
|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> 230V 1ph   | <input type="checkbox"/> 240V 1ph   |
| <input type="checkbox"/> 230V 3ph   | <input type="checkbox"/> 240V 3ph   |
| <input type="checkbox"/> 400V 3ph+N | <input type="checkbox"/> 480V 3ph+N |
| <input type="checkbox"/> 200V 3ph   | <input type="checkbox"/> 400V 3ph   |
| <input type="checkbox"/> 208V 1ph   | <input type="checkbox"/> 460V 3ph   |
| <input type="checkbox"/> 208V 3ph   |                                     |

### Optional equipment

#### Make your choice

- ☐ Clock timer
- ☐ Marine model
- ☐ Disassemble-able 2 deck oven
- ☐ Extra sliding shelf (not on UBC)
- ☐ Peel holder
- ☐ Oil and spice rack
- ☐ Side shelf.....up to 4 shelves per oven  
*Not on 4 / 5 deck ovens*

#### PizzaMaster design solution

- ☐ Phantom Black
- ☐ Royal Gold

#### Semi-automatic door opener\*

- ☐ Deck 1 (lower)
- ☐ Deck 2
- ☐ Deck 3
- ☐ Deck 4
- ☐ Deck 5

\*Add ovens width with 200 mm / 8 in.  
Requires separate 3ph supply.

#### Power Guard\*

- |        |                                 |                                            |
|--------|---------------------------------|--------------------------------------------|
| Deck 1 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary (lower) |
| Deck 2 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |
| Deck 3 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |
| Deck 4 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |
| Deck 5 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |

\*Sold in pair only  
(1 master deck + 1 secondary deck)

#### Steam system\*

- ☐ Deck 1 (lower)
  - ☐ Deck 2
  - ☐ Deck 3
  - ☐ Deck 4
  - ☐ Deck 5
- \*Not in combination with high temperature deck.  
Add ovens depth with 100 mm / 4 in.

#### High temperature deck\*

500°C / 932°F

- ☐ Deck 1 (lower)
- ☐ Deck 2
- ☐ Deck 3
- ☐ Deck 4
- ☐ Deck 5

\*Not in combination with extra high deck and/or steam system

#### Extra high deck\*

- ☐ Deck 1 (lower)
- ☐ Deck 2
- ☐ Deck 3
- ☐ Deck 4
- ☐ Deck 5

\*Not in combination with high temperature deck

#### UBC (Under built cabinet)\*

- \*UBC not available on 4 / 5 deck ovens
- ☐ UBC (Standard)
- ☐ UBC - P (Proofer cabinet)  
*Not US/CAN markets*

### Approvals available



**2 YEAR  
WARRANTY**

COMMERCIAL COOKING APPLIANCE

Limited

# PizzaMaster®



# PizzaMaster® 900 series

Technical Specifications – Installation Guide

|        |        |        |        |        |
|--------|--------|--------|--------|--------|
| PM 911 | PM 912 | PM 913 | PM 914 | PM 915 |
| PM 921 | PM 922 | PM 923 | PM 924 | PM 925 |
| PM 931 | PM 932 | PM 933 | PM 934 | PM 935 |
| PM 941 | PM 942 | PM 943 | PM 944 | PM 945 |

## PizzaMaster® 900 series

PizzaMaster\_900series\_Technical Specifications 90007\_EN\_R1C

| Model  | Dimensions in millimetres<br>Width x Depth x Height *a) |          | Dimensions in inches<br>Width x Depth x Height *a) |          | Decks | Power<br>kW per<br>deck | Capacity (pizzas per deck) |                 |                 |                 | Weight<br>Kg / lb |
|--------|---------------------------------------------------------|----------|----------------------------------------------------|----------|-------|-------------------------|----------------------------|-----------------|-----------------|-----------------|-------------------|
|        | External                                                | Internal | External                                           | Internal |       |                         | 254 mm<br>10 in            | 355 mm<br>14 in | 406 mm<br>16 in | 457 mm<br>18 in |                   |
| PM 911 | 1040 x 1125                                             | x 480    | 40.9 x 44.3                                        | x 18.9   | 1     | 8.5                     | 6                          | 3               | 2               | 1               | 203 / 447         |
| PM 912 |                                                         | x 820    |                                                    | x 32.3   | 2     |                         |                            |                 |                 |                 | 281 / 619         |
| PM 913 |                                                         | x 1160   |                                                    | x 45.7   | 3     |                         |                            |                 |                 |                 | 354 / 780         |
| PM 914 |                                                         | x 1500   |                                                    | x 59.1   | 4     |                         |                            |                 |                 |                 | 426 / 939         |
| PM 915 |                                                         | x 1840   |                                                    | x 72.5   | 5     |                         |                            |                 |                 |                 | 515 / 1135        |
| PM 921 | 1350 x 1125                                             | x 480    | 53.2 x 44.3                                        | x 18.9   | 1     | 11.0                    | 12                         | 5               | 4               | 4               | 243 / 535         |
| PM 922 |                                                         | x 820    |                                                    | x 32.3   | 2     |                         |                            |                 |                 |                 | 330 / 727         |
| PM 923 |                                                         | x 1160   |                                                    | x 45.7   | 3     |                         |                            |                 |                 |                 | 441 / 927         |
| PM 924 |                                                         | x 1500   |                                                    | x 59.1   | 4     |                         |                            |                 |                 |                 | 539 / 1188        |
| PM 925 |                                                         | x 1840   |                                                    | x 72.5   | 5     |                         |                            |                 |                 |                 | 638 / 1406        |
| PM 931 | 1810 x 1125                                             | x 480    | 71.3 x 44.3                                        | x 18.9   | 1     | 16.8                    | 18                         | 8               | 6               | 6               | 282 / 621         |
| PM 932 |                                                         | x 820    |                                                    | x 32.3   | 2     |                         |                            |                 |                 |                 | 431 / 950         |
| PM 933 |                                                         | x 1160   |                                                    | x 45.7   | 3     |                         |                            |                 |                 |                 | 580 / 1278        |
| PM 934 |                                                         | x 1500   |                                                    | x 59.1   | 4     |                         |                            |                 |                 |                 | 729 / 1607        |
| PM 935 |                                                         | x 1840   |                                                    | x 72.5   | 5     |                         |                            |                 |                 |                 | 878 / 1935        |
| PM 941 | 2270 x 1125                                             | x 480    | 89.4 x 44.3                                        | x 18.9   | 1     | 21.3                    | 24                         | 11              | 8               | 8               | 412 / 908         |
| PM 942 |                                                         | x 820    |                                                    | x 32.3   | 2     |                         |                            |                 |                 |                 | 665 / 1466        |
| PM 943 |                                                         | x 1160   |                                                    | x 45.7   | 3     |                         |                            |                 |                 |                 | 920 / 2028        |
| PM 944 |                                                         | x 1500   |                                                    | x 59.1   | 4     |                         |                            |                 |                 |                 | 1173 / 2586       |
| PM 945 |                                                         | x 1840   |                                                    | x 72.5   | 5     |                         |                            |                 |                 |                 | 1427 / 3145       |

\*a) Model deck height For total oven height = Model deck height + leg and casters height + eyebrow hood

### IMPORTANT!

All installations and services must comply to local and national codes and be carried out by qualified servicers and electricians only.

#### Placement

Oven must be installed with a clearance of 50 mm / 2 in towards all sides.

#### Electrical

For wire dimension (mm2/AWG) see ovens connecting terminal and/or the manual.

#### Ventilation


Min. 200 m3/h / 115 CFM per deck / connection. (Connection Ø100 mm / Ø3.95in).

#### Water

Pressure between 1-6 bar (0.1-0.6 MPa). Connection G ¾ " / NH ¾ " (for US/CAN).

#### Connections

Ventilation Water Electrical  
(deck)



Ventilation (eyebrow hood)

### Amps per phase and Deck <sup>(1)</sup> or Oven <sup>(2)</sup> for ovens with – Power Guard, see <sup>(3)</sup> – Door Opener, see <sup>(4)</sup>

| Model  | 230V<br>1ph+N | 230V<br>3ph | 400V 3ph+N |           | 200V<br>3ph | 208V<br>1ph | 208V<br>3ph | 240V<br>1ph | 240V<br>3ph | 480V 3ph+N |           | 400V<br>3ph | 460V<br>3ph<br>(440-480) |
|--------|---------------|-------------|------------|-----------|-------------|-------------|-------------|-------------|-------------|------------|-----------|-------------|--------------------------|
|        | (1)           | (1)         | (1)        | (2)       | (1)         | (1)         | (1)         | (1)         | (1)         | (1)        | (2)       | (1)         | (1)                      |
| PM 911 | 33.4          | 19.4        | 11.3       | 11.3      | 20.6        | 37.0        | 21.4        | 34.9        | 20.2        | 9.4        | 9.4       | 11.2        | 9.7                      |
| PM 912 |               |             |            | 22.5      |             |             |             |             |             |            | 18.7      |             |                          |
| PM 913 |               |             |            | 33.7      |             |             |             |             |             |            | 28.0      |             |                          |
| PM 914 |               |             |            | 34.0+11.1 |             |             |             |             |             |            | 28.3+9.3  |             |                          |
| PM 915 |               |             |            | 34.4+22.2 |             |             |             |             |             |            | 28.6+18.5 |             |                          |
| PM 921 | 47.7          | 27.6        | 15.9       | 15.9      | 29.3        | 52.7        | 30.5        | 49.7        | 28.7        | 13.2       | 13.2      | 15.9        | 13.8                     |
| PM 922 |               |             |            | 31.8      |             |             |             |             |             |            | 26.4      |             |                          |
| PM 923 |               |             |            | 47.7      |             |             |             |             |             |            | 39.6      |             |                          |
| PM 924 |               |             |            | 48.1+15.9 |             |             |             |             |             |            | 39.9+13.2 |             |                          |
| PM 925 |               |             |            | 48.4+31.8 |             |             |             |             |             |            | 40.2+26.4 |             |                          |
| PM 931 | 73.2          | 42.4        | 24.5       | 24.5      | 45.1        | 81.0        | 46.9        | 76.4        | 44.2        | 20.4       | 20.4      | 24.4        | 21.2                     |
| PM 932 |               |             |            | 49.0      |             |             |             |             |             |            | 40.7      |             |                          |
| PM 933 |               |             |            | 73.4      |             |             |             |             |             |            | 61.0      |             |                          |
| PM 934 |               |             |            | 73.4+24.5 |             |             |             |             |             |            | 61.0+20.4 |             |                          |
| PM 935 |               |             |            | 73.5+49.0 |             |             |             |             |             |            | 61.1+40.7 |             |                          |
| PM 941 | 92.8          | 53.7        | 31.0       | 31.0      | 57.1        | -           | 59.4        | 96.8        | 56.0        | 25.8       | 25.8      | 30.9        | 26.9                     |
| PM 942 |               |             |            | 62.0      |             |             |             |             |             |            | 51.5      |             |                          |
| PM 943 |               |             |            | 93.0      |             |             |             |             |             |            | 77.2      |             |                          |
| PM 944 |               |             |            | 93.0+31.0 |             |             |             |             |             |            | 77.2+25.8 |             |                          |
| PM 945 |               |             |            | 93.1+62.0 |             |             |             |             |             |            | 77.3+51.5 |             |                          |

(1) Amps per phase and deck (1 power supply cable per oven deck).

(2) Amps per phase and oven, 1-3 decks (1 power supply cable per oven) 4-5 deck (2 power supply cables per oven).

(3) Power Guard is sold in pair (Primary and Secondary deck) and reduce max. Amp draw for 2 decks with 50%.

(4) Door Opener require 1 separate 3phase, same voltage as main oven supply. Supplies up to 5 deck. Amp draw 1 A / deck / phase.

### Distributor

#### Built for Extreme Temperature



PM 911 / 921 / 931 / 941




PM 912 / 922 / 932 / 942



PM 913 / 923 / 933 / 943



PM 914 / 924 / 934 / 944



PM 915 / 925 / 935 / 945

# PizzaMaster®



Customer Support: Tel: +46 33 230-025

E-mail: info@pizzamaster.com

Website: www.pizzamaster.com

